



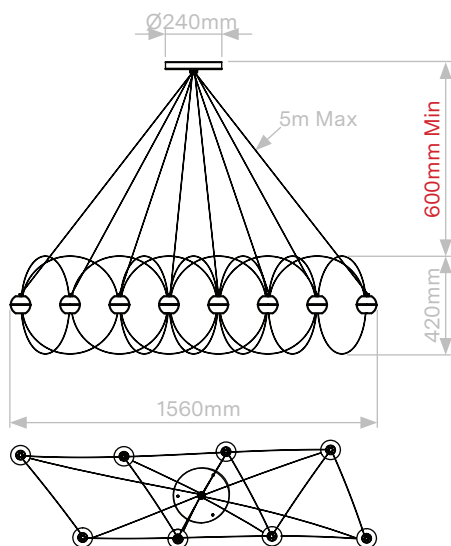

Finitions

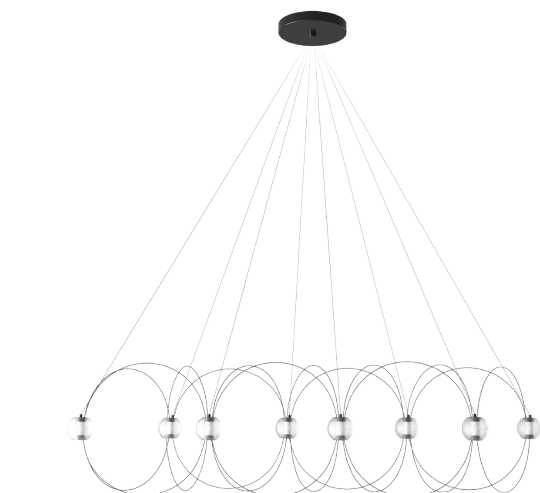

DCW Refs

MUNARI 8 P 2400K BL
MUNARI 8 P 2400K BL PRE-ASSEMBLED
MUNARI 8 P 2400K GOL
MUNARI 8 P 2400K GOL PRE-ASSEMBLED
DALI CONVERTER
CASAMBI CONTROLLER CBU-TED

3700677662514
3700677662774
3700677662521
3700677662781
3700677662866
3700677662293

MUNARI 8

Lutz PANKOW

Typologie
Typology

Tension
Voltage

Indice de protection
Protection index

Classe
Class

Puissance
Power

Source Lumineuse
Light Source

Température de couleur
Color Temperature

Flux Lumineux
Light Flux

Driver
Driver

Gradation
Dimming

Câble
Cable

Matériaux
Materials

Poids Net
Net Weight

Poids Brut
Gross Weight

Emballage
Packaging

Marquages
Marks

EPREL
EPREL

Options
Options

Suspension
Pendant lamp

220-240 V

20

1

26 W

LED Intégrée
Integrated LED

2400 K

5120 Lm (valeur nominale)
5120 Lm (nominal value)

Intégré - CV - 24 V - 107×40×22 mm
Integrated - CV - 24 V - 107×40×22 mm

Oui - TRIAC
Yes - TRIAC

Noir - 5 m
Black - 5 m

Acier, polycarbonate, aluminium
Steel, polycarbonate, aluminum

3,2 Kg

4,9 Kg

981×289×87 mm

CE UK CA

D (2163959)

DALI via convertisseur
DALI with converter

CASAMBI via contrôleur
CASAMBI with controller

