

# FLOS

## BELLHOP H 850 MM

<b>Light distribution</b>	Symmetric
<b>Height (mm)</b>	850
<b>Insulation class</b>	Class I
<b>Beam angle</b>	85°
<b>Mounting</b>	Floor
<b>Lamps description</b>	Power LED: 8W - 816 lm ≠ FIXT 580 lm - 3000K/CRI 80 - 220-240V
<b>Environment</b>	Outdoor
<b>Technical description</b>	Bollard version of the Bellhop Outdoor Collection for diffuse light. Made of extruded and die-cast aluminium or stainless steel, Bellhop is available in two heights for the bollard model and with different lumens and luminaire outputs as to comply with any outdoor setting and lighting scenario need.



### Bellhop H 850 mm

designed by Edward Barber and Jay Osgerby

## ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Emergency</b>	Without
<b>Voltage (V)</b>	220/240

220/240V power supply included. Ready for installation on rigid base. Each luminaire is equipped with a segment of 20 cm cable for connection inside the luminaire body. Suggested connection with 2 way terminal block 3 phases IP68, to be ordered separately. Version 110V upon request.


## PHYSICAL

<b>Aiming</b>	Fixed
<b>IK rating</b>	10
<b>Weight (kg)</b>	1,80 (3 Kg Stainless Steel)
<b>Number of heads</b>	1



- F003B31A001 White
- F003B31A006 Grey
- F003B31A033 Anthracite
- F003B31A030 Black
- F003B31A018 Deep Brown
- F003B31A005 Stainless Steel



## DIMENSIONS



## CERTIFICATIONS

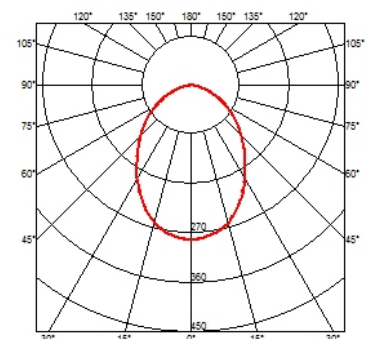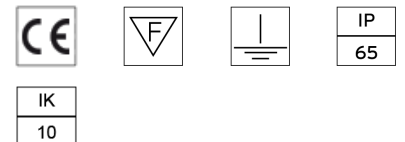

## Bellhop H 850 mm .Accessories


### Electrical



○ F990C00A000

#### 2 way terminal block 3 poles IP68

7-12 mm cables




○ F990E00A000

#### Surge protection device

Surge protection device. 275Vac. Maximum discharge current 10kA (8/20us). Maximum operating current 5A. Suitable for series connection. IP66.

### Structural



○ F003Z010000

#### Base plate with bolt




### Bellhop H 850 mm

designed by Edward Barber and Jay Osgerby



220/240V power supply included. Ready for installation on rigid base. Each luminaire is equipped with a segment of 20 cm cable for connection inside the luminaire body. Suggested connection with 2 way terminal block 3 phases IP68, to be ordered separately. Version 110V upon request.

- F003B31A001 White
- F003B31A006 Grey
- F003B31A033 Anthracite
- F003B31A030 Black
- F003B31A018 Deep Brown
- F003B31A005 Stainless Steel

### DIMENSIONS



### CERTIFICATIONS

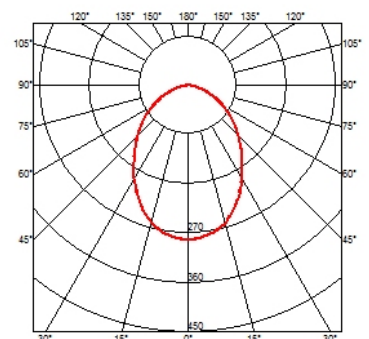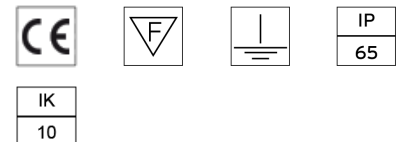

# FLOS

## Bellhop H 850 mm . Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED




### Bellhop H 850 mm

designed by Edward Barber and Jay Osgerby

220/240V power supply included. Ready for installation on rigid base. Each luminaire is equipped with a segment of 20 cm cable for connection inside the luminaire body. Suggested connection with 2 way terminal block 3 phases IP68, to be ordered separately. Version 110V upon request.

- F003B3IA001 White
- F003B3IA006 Grey
- F003B3IA033 Anthracite
- F003B3IA030 Black
- F003B3IA018 Deep Brown
- F003B3IA005 Stainless Steel

### DIMENSIONS



### CERTIFICATIONS

