



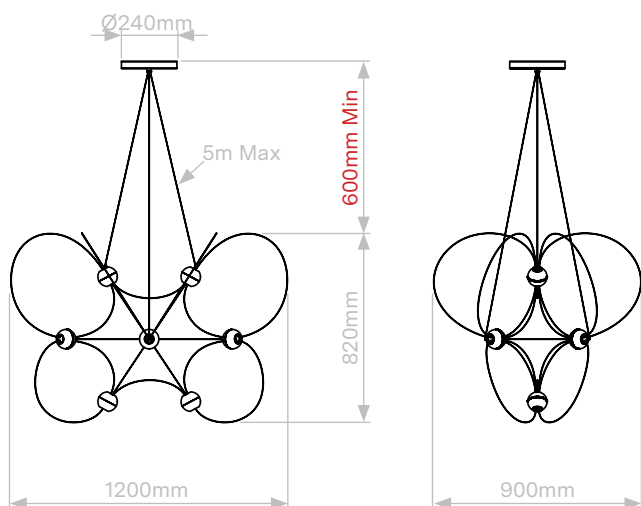

Finitions

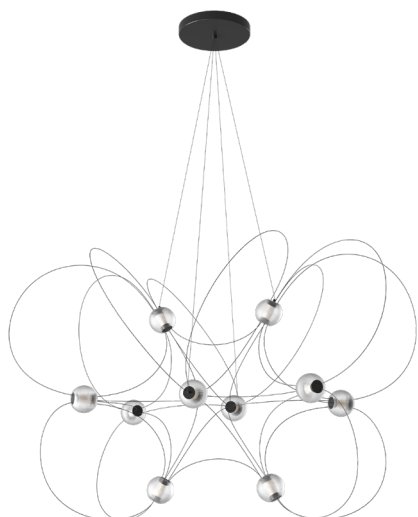

DCW Refs

MUNARI 10 P 2400K BL
MUNARI 10 P 2400K BL PRE-ASSEMBLED
MUNARI 10 P 2400K GOL
MUNARI 10 P 2400K GOL PRE-ASSEMBLED
DALI CONVERTER
CASAMBI CONTROLLER CBU-TED

3700677662538
3700677662798
3700677662545
3700677662804
3700677662866
3700677662293

MUNARI 10

Lutz PANKOW

Typologie

Typology

Suspension
Pendant lamp

Tension

Voltage

220-240 V

Indice de protection

Protection index

20

Classe

Class

1

Puissance

Power

32 W

Source Lumineuse

Light Source

LED Intégrée
Integrated LED

Température de couleur

Color Temperature

2400 K

Flux Lumineux

Light Flux

6400 Lm (valeur nominale)
6400 Lm (nominal value)

Driver

Driver

Intégré - CV - 24 V - 133×47×29 mm
Integrated - CV - 24 V - 133×47×29 mm

Gradation

Dimming

Oui - TRIAC
Yes - TRIAC

Câble

Cable

Noir - 5 m
Black - 5 m

Matériaux

Materials

Acier, polycarbonate, aluminium
Steel, polycarbonate, aluminum

Poids Net

Net Weight

3,3 Kg

Poids Brut

Gross Weight

5,2 Kg

Emballage

Packaging

1064×303×87 mm

Marquages