




# LEAF FLOOR LAMP – EU VERSION

**BROBERG & RIDDERSTRÅLE ON THE DESIGN** “Combining a light and elegant design with an energy-efficient LED technology, the Leaf Floor Lamp has a clean and refined expression. The asymmetric geometry of the design gives it an organic and friendly appearance, inspired by the leaves on a tree. Turn the leaf according to your needs and discover how the lamp will subtly transform its shape, adding a graphic and gentle light silhouette to any space.”

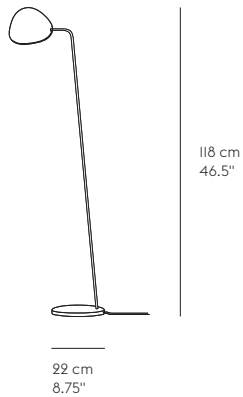

## DESIGNED BY / YEAR OF DESIGN

Broberg & Ridderstråle / 2012

## ABOUT THE DESIGNER

Broberg & Ridderstråle are Swedish design and architectural partners. Their work combines an aesthetic rationality with a touch of humour and wit. Mats Broberg and Johan Ridderstråle have both graduated from Konstfack University of design with honours and have been awarded the Swedish Art Council's working grant. Their work has successfully been exhibited in Tokyo, Milan and London.

## CATEGORY

Floor lamp

## ENVIRONMENT

Indoor

## DESCRIPTION

Leaf is a lamp series with an iconic silhouette in two sizes and a wide range of colours. Leaf uses energy-efficient LED technology and is equally suited for your private home as an office or commercial interior. The lamp's dim function makes it possible to control the light and mood in a room.

## PRODUCTION PROCESS

Leaf is a result of a process combining turned and casted aluminum and steel, with a strong powder coating as paint.

## MATERIAL

Aluminum, steel, brass, colored PVC cord

## CORD LENGTH

180 cm / 71"

## BULB INCLUDED

Yes

## DIMMABLE FUNCTION

Yes

## CLEANING AND CARE

Wipe off dust with dry cloth. If necessary use moist cloth, then dry off. Do not use abrasive cleaning agents.



Black



White



Grey



Dark Green



Copper Brown




# LEAF FLOOR LAMP – EU VERSION



## LAMP RATING

Voltage	110-240V
Frequency	50/60Hz
IP Rating	IP20
Classification	Class II
Socket	52 x non-replaceable LEDs (8W)

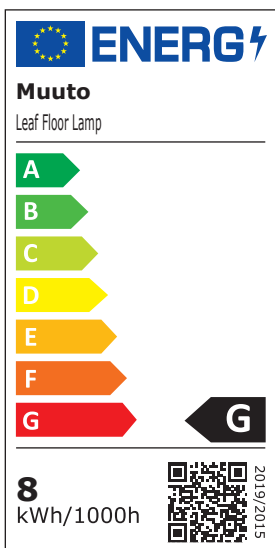

## BULB SPECIFICATION

Item	Integrated LED
Watt	8W
Lumen	370 lm
Color temperature	3.000
Color consistency	3 McAdam steps
Lumen maintenance (70%)	54.000 h
CRI	>90
Dimmable	yes
Risk group	Except

## GENERAL STANDARDS & CERTIFICATES

### EU/UK

REACH  
 Directive - EC/1907/2006

Low Voltage Directive (LVD)- 2014/35/EU  
 IIEC 60598-1 and  
 IEC 60598-2-4 (EU deviations)

ROHS Directive - 2011/65/EU amended RoHS 3 Directive 2015/863

ECO Design Directive - 245/2009/EC

Electromagnetic Compatibility (EMC) Directive - 2014/30/EU

WEEE Directive - 2012/19/EU

### AU/NZ

RCM  
 EN 60598-1 and EN 60598-2-4 (AUZ/NZ deviations)

