
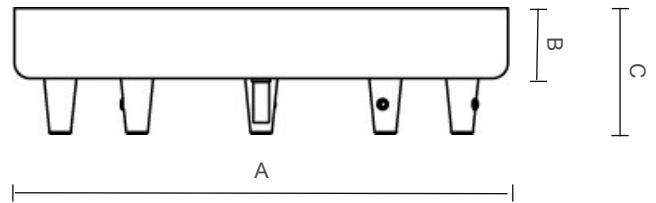


Montageanvisning T-1105



Monteringsanvisning 1105 V.3

8921, 8922, 8924, 8926


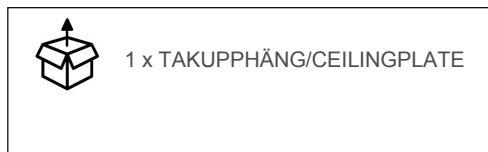


Max belastning 14 Kg/ Max load 14 Kg

	8921	8922	8924	8926
A (Ø)mm	330	330	320	320
B mm	49	49	45	45
C mm	86	86	81	81

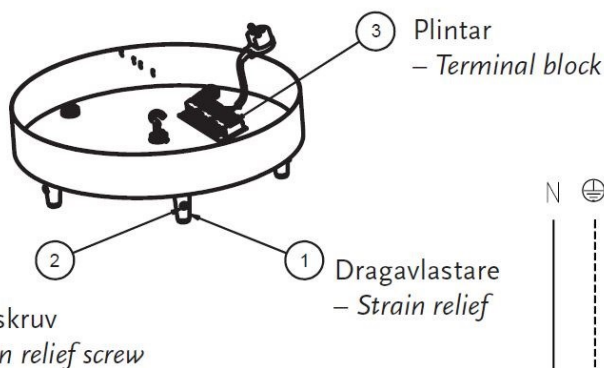

Pvc-slangen är till för att skydda kabeln vid dragning av stoppskruv/
The pvc hose is used to protect the cable when the strain relief screw is fixed.

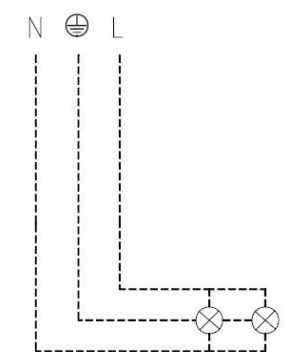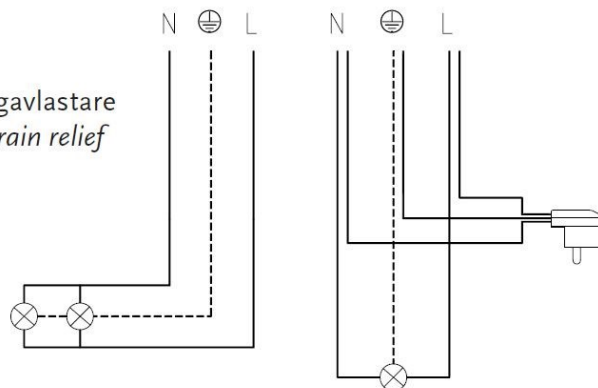

Endast 8922 och 8926/
Only 8922 and 8926

Installationen skall utföras av behörig installatör.

Max belastning 14 Kg.

Börja med att trä på pvc-slang på kablar från lampupphäng. Kablar dras sedan genom medföljande (1.) dragavlastare och justeras till rätt längd, pvc slangen ska placeras i avlastaren, därefter dras (2.) stoppskruv i avlastaren åt. Kablar kopplas in på medföljande (3.) plintar även jordkabel om sådan finns.

The lighting fixture may only be installed by an authorized electrician..

Max load 14Kg

Thread the pvc hose onto the cables from the suspension. Pull the cables through the strain relief (1) and adjust them to the proper length. The hose has to be placed in the strain relief, then fasten the (2) strain relief screw. Connect the cables and the earth connector to the (3) terminal block.



230VAC
50/60Hz